


Siluminlösfläns / Aluminium loose flange

PN 10 and PN 16

	Drilling PN 10					German Type PN 10 (DIN 2642 dimensions) AlSi12Cu				Italian Type PN 10 Mating Dimensions AlSi12CuFe				Swedish Type PN 10 Mating Dimensions AlSi12Cu		
	DN	D	dk	d ₂	st	ISO d ₆	NS d ₆	Type B	b	D	ISO d ₆	NS d ₆	b	ISO d ₆	NS d ₆	b
PN 10/16	10	90	60	14	4	19	19	-	16	90	19	19	12	19	19	16
	15	95	65	14	4	24	23	23	16	95	24	23	12	24	23	16
	20	105	75	14	4	30	28	28	16	105	30	28	12	30	28	16
	25	115	85	14	4	36	33	33	16	115	36	33	12	36	33	16
	32	140	100	18	4	46	42	42	16	140	46	42	16	46	42	16
	40	150	110	18	4	54	48	50	18	150	54	48	16	54	48	18
	50	165	125	18	4	65	60	62	18	165	65	60	16	65	60	18
	65	185	145	18	4	81	75	81	18	185	81	75	16	81	79	20
	80	200	160	18	8	94	90	94	20	200	94	90	18	94	90	21
	100	220	180	18	8	119	111	113	20	220	119	111	18	119	111	23
PN 10	125	250	210	18	8	145	136	138	22	250	145	136	18	145	140	25
	150	285	240	22	8	173	161	164	22	285	173	161	18	173	165	28
	200	340	295	22	8	225	212	222	24	340	225	212	20	225	218	32
	250	395	350	22	12	279	264	273	26	395	279	264	22	279	270	36
	300	445	400	22	12	329	315	324	26	445	329	315	22	329	318	39
	350	505	460	22	16	362	362	-	26	505	362	362	22			
	400	565	515	26	16	413	413	-	32	565	413	413	25			
	450	615	565	26	20	465	465	-	32	615	465	465	25			
	500	670	620	26	20	517	517	-	34	670	517	517	28			
	600	780	725	30	20	618	618	-	36	780	618	618	30			
PN 16	700	895	840	30	24	721	721	-	40	895	721	721	40			
	800	1015	950	33	24	824	824	-	44	1015	824	824	44			
	900	1115	1050	33	28	920	920	-	44	1115	920	920	44			
	1000	1230	1160	36	28	1020	1020	-	44	1230	1020	1020	44			
	1100	1340	1270	36	32		1124	-	44			1124	44			
	1200	1455	1380	39	32	1232	1232	-	52	1455	1232	1232	52			

	Drilling PN 16					PN 16 Mating Dimensions AlSi12Cu			
	DN	D	dk	d ₂	st	ISO d ₆	NS d ₆	Type B	b
PN 16	200	340	295	22	12	225	212	-	20
	250	405	355	26	12	279	264	-	26
	300	460	410	26	12	329	315	-	26
	350	520	470	26	16	362	362	-	26
	400	580	525	30	16	413	413	-	30
	500	715	650	33	20	517	517	-	30
600	840	770	36	20	620	620	-	30	

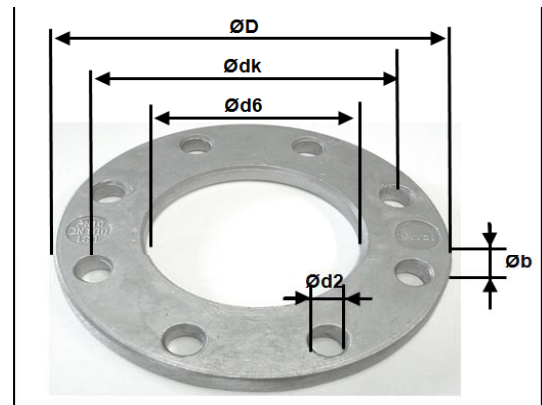

Surface treatment

Our flanges are delivered blank or epoxy powder coated. Surface treatment on flanges is carried out acc. to the wishes of Customers. Our stock colours are RAL 7032, 7035, 7001 and white. The thickness of the painting is min 70 µm.

Cast aluminium alloy – Chemical compositions

AlSi12Cu											
	Al	Cu	Fe	Mg	Mn	Ni	Pb	Si	Sn	Ti	Zn
min	rest	-	-	-	-	-	-	11	-	-	-
max	rest	1,2	0,9	0,3	0,5	0,3	0,2	13,5	0,1	0,2	0,5